



GM9413-5

Lo-Cog® DC Gearmotor

Assembly Data	Symbol	Units	Value	
Reference Voltage	E	V	12	
No-Load Speed	S _{NL}	rpm (rad/s)	4	(0.4)
Continuous Torque (Max.) ¹	T _C	oz-in (N-m)	175	(1.2E+00)
Peak Torque (Stall) ²	T _{PK}	oz-in (N-m)	2913	(2.1E+01)
Weight	W _M	oz (g)	16.3	(463)
Motor Data				
Torque Constant	K _T	oz-in/A (N-m/A)	5.60	(3.95E-02)
Back-EMF Constant	K _E	V/krpm (V/rad/s)	4.14	(3.95E-02)
Resistance	R _T	Ω	8.33	
Inductance	L	mH	6.17	
No-Load Current	I _{NL}	A	0.10	
Peak Current (Stall) ²	I _P	A	1.44	
Motor Constant	K _M	oz-in/√W (N-m/√W)	1.94	(1.37E-02)
Friction Torque	T _F	oz-in (N-m)	0.50	(3.5E-03)
Rotor Inertia	J _M	oz-in-s ² (kg-m ²)	3.9E-04	(2.8E-06)
Electrical Time Constant	τ _E	ms	0.74	
Mechanical Time Constant	τ _M	ms	14.7	
Viscous Damping	D	oz-in/krpm (N-m-s)	0.011	(7.6E-07)
Damping Constant	K _D	oz-in/krpm (N-m-s)	2.8	(1.9E-04)
Maximum Winding Temperature	θ _{MAX}	°F (°C)	311	(155)
Thermal Impedance	R _{TH}	°F/watt (°C/watt)	66.4	(19.1)
Thermal Time Constant	τ _{TH}	min	11.1	
Gearbox Data				
Reduction Ratio			728.1	
Efficiency			0.53	
Maximum Allowable Torque		oz-in (N-m)	175	(1.24)
Encoder Data				



Included Features

- 2-Pole Stator
- Ceramic Magnets
- Heavy-Gauge Steel Housing
- 7-Slot Armature
- Silicon Steel Laminations
- Stainless Steel Shaft
- Copper-Graphite Brushes
- Diamond Turned Commutator
- Motor Sleeve Bearings
- Output Sleeve Bearing
- Standard Gears

Customization Options

- Alternate Winding
- Sleeve or Ball Bearings
- Modified Output Shaft
- Custom Cable Assembly
- Special Brushes
- EMI/RFI Suppression
- Alternate Gear Material
- Special Lubricant
- Optional Encoder
- Fail-Safe Brake

1 - Specified at max. winding temperature at 25°C ambient without heat sink. 2 - Theoretical values supplied for reference only.

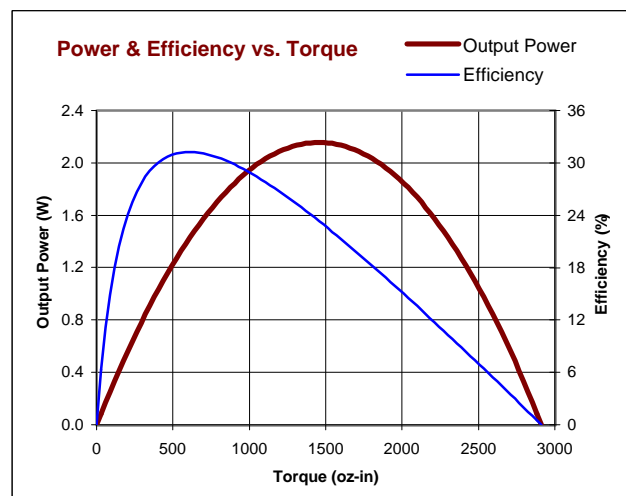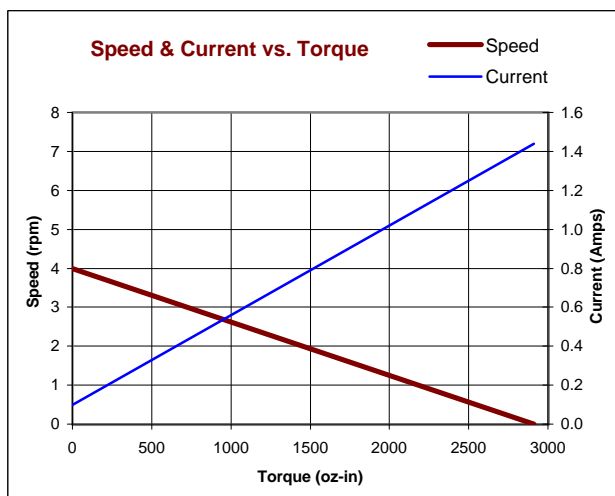

All values are nominal. Specifications subject to change without notice. Graphs are shown for reference only.

© 2001 Pittman.

